WPG series

Switch guard for switch series WP



DISTINCTIVE FEATURES

Prevent accidental lever operation

Latching



ENVIRONMENTAL SPECIFICATIONS

- Salt spray test: 96 hours (IEC 68-2-11)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Front panel sealing: IP67 according to IEC 60529

MATERIALS


- Support plate: black chrome plated brass
- Guard: Stainless steel
- Seal: fluorinated silicone, black

The company reserves the right to change specifications without notice.

WPG series

Switch guard for switch series WP

BUILD YOUR PART NUMBER

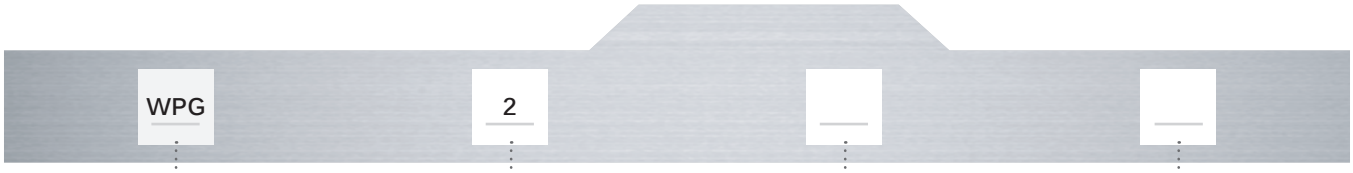

MECHANICAL FUNCTION	
1	Latching

COLOR BOTTOM	
2	Black

COLOR TOP	
1	Blue
2	Black
3	Green
4	Grey
5	Yellow
6	Red
7	White
9	Yellow

ABOUT THIS SERIES


Mounting accessories: one seal supplied, thickness of the seal: 1.1 mm (-0/+0.1 mm)

WPG series

Switch guard for switch series WP

DIMENSIONS



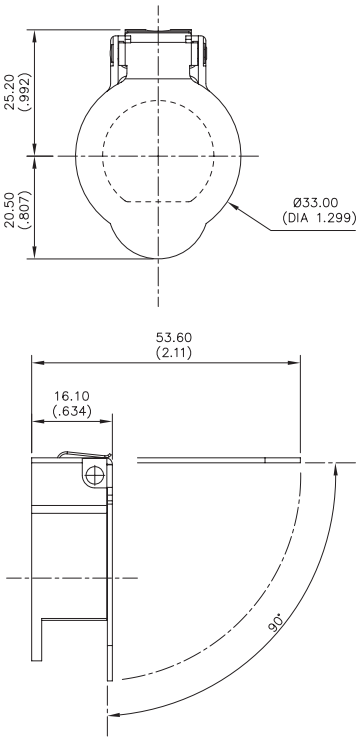


WPG series

Switch guard for switch series WP

CORRECTNESS PROCEDURE

CHANGES DONE:
PAGE 1 : REMOVING «INOX» BY « STAINLESS STEEL»

This datasheet have been approved and can be officially released.

Vivien Rineau 26/04/2023 DATE AND SIGNATURE	 Manon LOBB 26/04/2023 DATE AND SIGNATURE
PRODUCT MANAGER	COMMUNICATION DEPARTMENT